

PRIOCAB Typ90

Under-table safety cabinets according to DIN EN 14470-1



**Material
+ Decor**
A2 Class

**Fire
Resistance**
FWF 90



Fire resistant under table type 30 pull-out cabinet for proper storage of flammable liquids and solid materials in work areas.

Type 90 safety cabinets, tested and certified in accordance with EN 14470-1, offer a fire resistance rating of 90 minutes, and are GS (geprüfte Sicherheit - tested safety) certified.

The cabinets offer an extraordinary level of stability and a long service life. The base material is high-density, and does not represent a fire load.

The high-quality interior and exterior surfaces are easy to clean. The doors of the safety cabinets close automatically in case of a fire.

Function

- GS Certificates
- Fire resistance 90 minutes
- Safety cabinet Typ90 according to EN 14470-1
- Suitable for the storage of inflammable fluids



■ Door-closing mechanism



■ Back side: Ventilation openings for incoming and exhaust air and pipe penetrations



■ Shelve, 60 kg bearing load



■ Certified, flame-resistant pipe penetrations

Construction & Equipment

- Safety cabinet with high-quality surface inside and outside
- Single-leaf doors and walls made of solid homogeneous material
- Available in three different versions (width 592 mm and 1100 mm, 1100 mm with two pull-outs)
- Self-closing ventilation and exhaust opening in case of fire on the rear side of the cabinet, connections DN 100 mm
- Free-moving drawer with locking function in case of fire
- Certified, flame-resistant pipe penetrations for use as unloading/disposal station
- Earthing terminal for safely transferring hazardous substances
- Lockable with cylinder lock including closure-status indicator
- Cabinet is equipped with rollers for easy on-site movement

Material & Surface

- Standard surface CP laminate is chemically highly stable and moisture-resitant
- Building material with surface coating, classified A2 – s1, d0: non-combustible
- Surface light grey, similar to RAL 7035

Options and accessories


- Doors and entire body in alternative RAL colours / surfaces, on request
- Recirculated air attachment, ready to plug in
- Fine (pre)filter for EBEL:VENT-EN-U (replacement)
- Replacement active charcoal filter for EBEL:VENT-EN-U




EBEL:VENT-EN-U
Recirculated air attachment
Technical specifications see page: 16

**Under-table safety cabinet
with one pull-out**


EN90U:063-110-1AFB

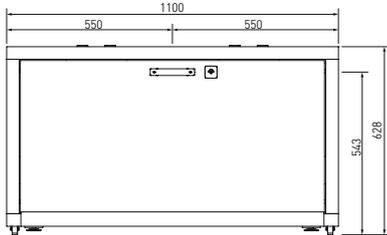


Front view




Side view

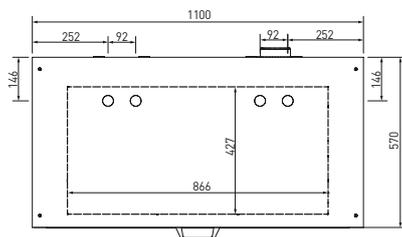

Top view

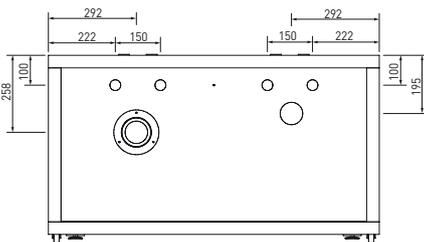


Rear view

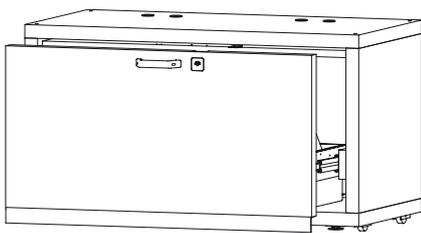


EN90U:063-110-1AFB
1 Fully-extendable shelf

**Under-table safety cabinet
with two pull-outs**


EN90U:063-110-2AFS

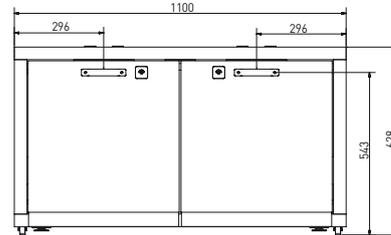


Front view




Side view

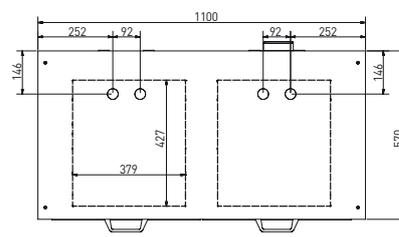

Top view

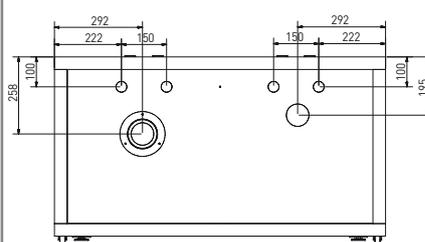

Rear view

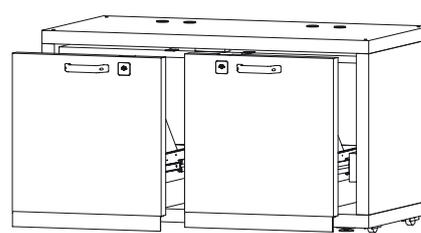


EN90U:063-110-2AFS
2 Fully-extendable shelves



Products for safe storage of
lithium-ion batteries

Under-table safety cabinet with one pull-out

EN90U:063-060-1AFS

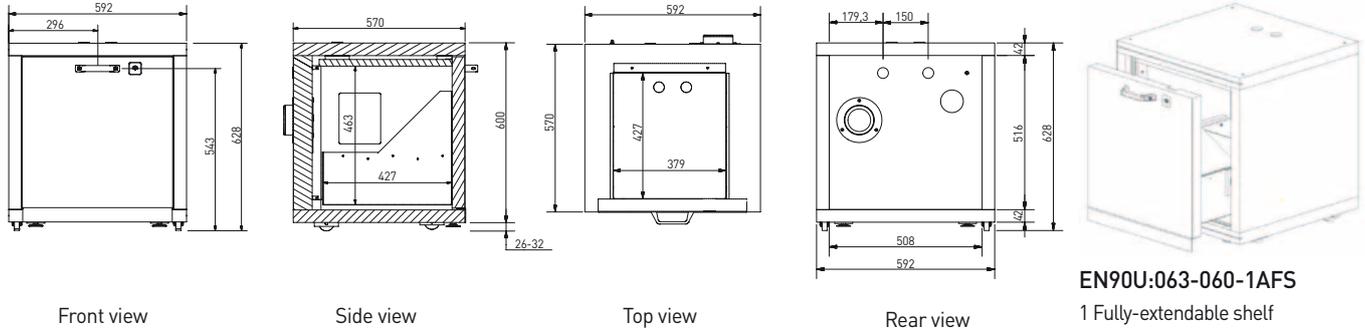

EN90U:063-060-1AFS
1 Fully-extendable shelf

Art.	Code ¹	H x W x D mm	H x W x D mm	kg	L	Features	Material
Under-table safety cabinet, Typ90 with fully-extendable shelf							
EN90U:063-110-1AFB -x		464 x 866 x 427	630 x 1100 x 570	233	49	1 fully-extendable shelf, load capacity 60 kg	
EN90U:063-110-2AFS -x		2x 463 x 379 x 427		250	2 x 22	2 fully-extendable shelves, load capacity 60 kg	Sheet steel, powder coated, RAL 7035
EN90U:063-060-1AFS -x		464 x 379 x 427	630 x 592 x 570	149	22	1 fully-extendable shelf, load capacity 60 kg	

¹Colour code x: 1 = Doors and plinth panel in yellow, similar to RAL 1023
without = Standard product, light grey, similar to RAL 7035

Order example:

EN90U:063-110-2AFS-1 → Type 90 under-table safety cabinet with two full pull-outs — exterior in light grey resembling RAL 7035

Art.	Accessories
Artificial ventilation	
EBEL:VENT-EN-U	Recirculated air attachment, ready to plug in incl. adapter set and connection hose
HF.SF.9405	Fine (pre)filter for EBEL:VENT-EN-U (replacement)
HF.AK.9404	Replacement active charcoal filter for EBEL:VENT-EN-U