



**Material  
+ Decor  
A2 Class**

**Smoke  
Protection  
min leakage**

## PRIODIS Basic

### Secure monitor housing

The enclosure consists of non-combustible fire protection panels as well as safety glazing and completely encloses the monitors. The outbreak of fire or generation of smoke is prevented, as no oxygen after-flow is not possible. A natural fire test provided evidence of this.

#### Function

- Tested fire protection
- Natural fire test
- Smoke protection
- Encapsulation of fire load
- Protection against vandalism



- Smoke-tight sealing on rough wall



- Housing ready for operation with smoke seal and safety glass



- Many surfaces possible

## Construction


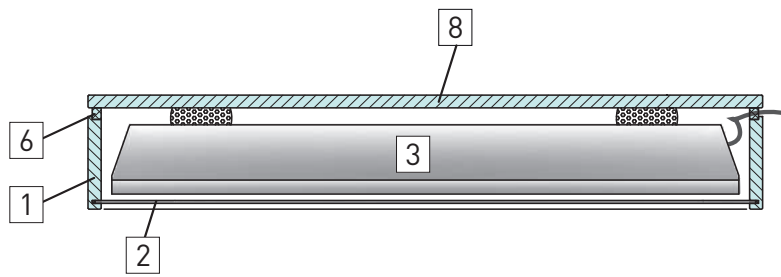
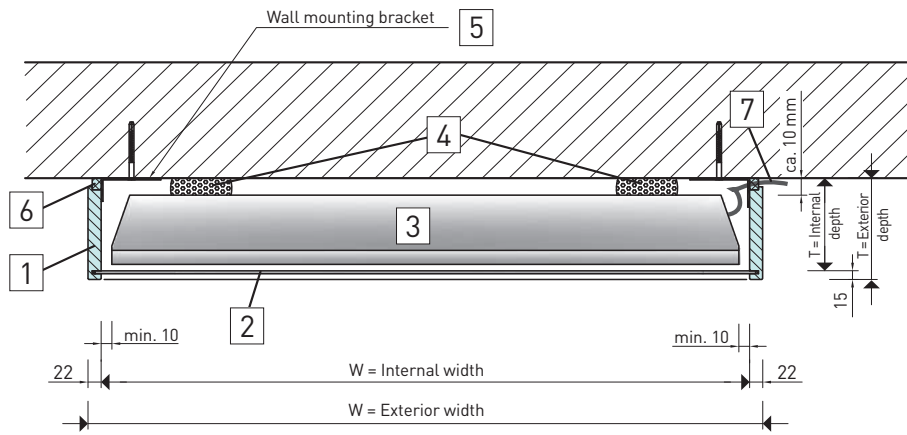
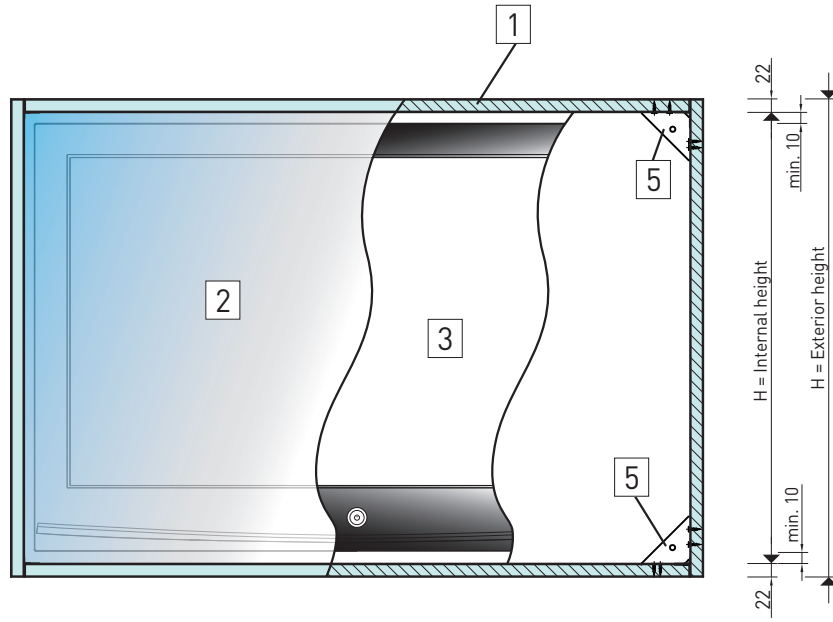
- Housing made of non-combustible fire protection panels with easy-care surface
- Brilliant, tempered safety glass
- Cable entry with fire protection seal
- Simple installation
- Horizontal and vertical installation possible

## Scope of delivery






- Housing kit with safety glass
- Mounting bracket with mounting material
- Installation template
- Installation Instruction

## Material characteristic

- Non-combustible board with surface coating, classification A2 - s1, d0
- Standard colour white - similar to RAL 9016




- 1 Housing soffit
- 2 Safety glass
- 3 Monitor (not included)
- 4 Distance buffer
- 5 Fixing bracket
- 6 Flexible fire and smoke seal, circumferential
- 7 Cable entry up to  $\varnothing$  10 mm
- 8 Additional rear wall


Art.	 H x W x D mm	 max. H x W x D mm (Zoll*)		 $P_{Vmax} = W$	 kg
<b>PRIODIS Basic</b>					
DIS0032-046-076-19	504 x 804 x 215	460 x 760 x 195 [32"]	■	45	34
DIS0040-057-095-19	614 x 994 x 215	570 x 950 x 195 [40"]	■	63	46
DIS0046-064-108-19	684 x 1124 x 215	640 x 1080 x 195 [46"]	■	76	55
DIS0055-075-127-19	794 x 1314 x 215	750 x 1270 x 195 [55"]	■	97	69
<b>Made to measure</b>					
DIS-SAF	min. 344 x 300 x 100 max. 1100 x 1900 x 225	max. 1056 x 1856 x 205	■		k.A.

You can find the tender text at: [www.priorit.de](http://www.priorit.de)

\* Follow manufacturer's instructions.


$P_{Vmax}$  Maximum energy discharge in watts, for a maximum  $\Delta T$  of 10K inside/outside. Example: Inside: 34 °C, outside: 24 °C

 Overall dimensions

 Maximum monitor sizes (inch - visible screen size)

## Options and accessories

- Various PRIORIT surfaces, see pages 44
- Priming film - can be painted on-site
- Aluminium decor

Art.	Accessories	 H x W x D mm
<b>Rear wall for PRIODIS Basic</b>		
DIS0032-RW	Rear wall suitable for: DIS0032-049-076-19	504 x 804 x 22
DIS0040-RW	Rear wall suitable for: DIS0040-057-095-19	614 x 994 x 22
DIS0046-RW	Rear wall suitable for: DIS0046-064-108-19	684 x 1124 x 22
DIS0055-RW	Rear wall suitable for: DIS0055-075-127-19	794 x 1314 x 22